



DESCRIPTION


MC 740 is a surface mounted magnetic contact used in both alarm and security access control systems for protection of doors and windows against unauthorised opening. The magnetic contact is designed to be mounted in places with limited space.

MC 740 is certified according to EN 50131-2-6:2008.


MOUNTING INSTRUCTIONS

- MC 740P option with the cable inlet at the bottom of the housing is available.
- Contact and magnet should be installed in parallel, corresponding to each other. Offset will reduce the working distances.
- Contact can operate in front-to-front or side-to-side configuration.

CIRCUIT DIAGRAM

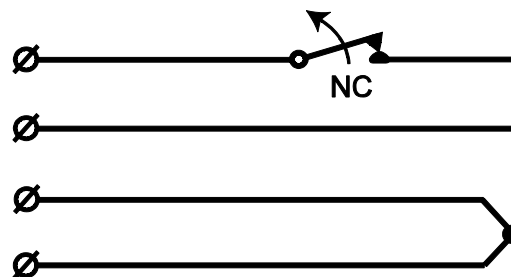

DISTANCE DIAGRAM -WOOD

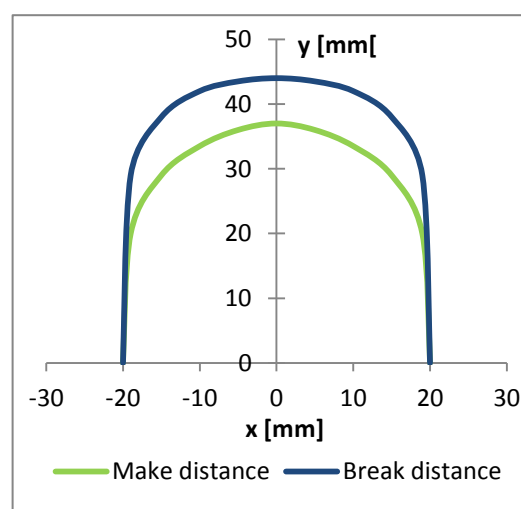

TECHNICAL DATA

Working environment	Wood	Steel
Make distance	typ. 37 mm +/- 40 %	not recommended
Break distance	typ. 44 mm +/- 40 %	not recommended
Contact type	form A, SPST	
Switching voltage max.	48 V DC/AC	
Switching current max.	400 mA DC/peak AC	
Contact rating max.	10 W	
Estimated life expectancy	>20 million switching operations at 10 V/4 mA	
Cable	2 m, ϕ 3,2 mm, 4x0,14 mm ²	
Environmental class (EN50130-5:2011)	IIIA	
Operating temperature range	-40°C to +55°C	
Operating humidity	max. 95% RH	
Housing material	plastic ABS	
Dimensions:		
Contact part	57,5 x 5 x 13,5 mm	
Magnet part	57,5 x 5 x 13,5 mm	
Security grade (EN50131-2-6:2008)	2	
Approvals	ITR 14/2013	

OPERATING PRINCIPLE

MC 740 magnetic contact has two parts: the contact part with a reed switch and the magnet part. In its neutral position the reed switch remains closed under the force of the magnetic field. Opening the monitored object increases the distance between the reed switch and the magnet. This reduces the influence of the magnetic field on the reed switch until it opens and activates an alarm.

Magnetic contacts should not be installed in the vicinity of strong magnetic fields.

INSTALLATION

Depending on the application, contact and magnet should be installed in either front-to-front or side-to-side configuration. MC 740P option increases the number of possible applications. Installation drawings show the correct positioning of the contact parts. Contact and magnet should be installed in parallel, corresponding to each other. Offset will reduce the working distances. The contact should be mounted on the stationary part of the monitored object (ex. door frame) and the magnet on the movable part (ex. door leaf).

After the installation, use an ohmmeter to check the electrical connections and test the operation of the magnetic contact.


Warning: applying excessive force to the housing of the contact may damage the glass body of the reed switches inside.

Warning: installation in ferromagnetic environment is not recommended.


INSTALLATION DRAWINGS

Correct positioning of side cable inlets ensure the maximum working distances.


MC 740 in front to front configuration – inlets on the same side:




MC 740 in side to side configuration (bottom view) – inlets facing outwards:

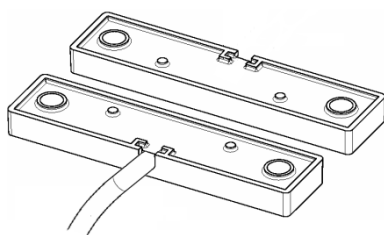

MC 740P in front to front configuration – inlets on the same side:




MC 740P in side to side configuration (bottom view) – inlets facing outwards:

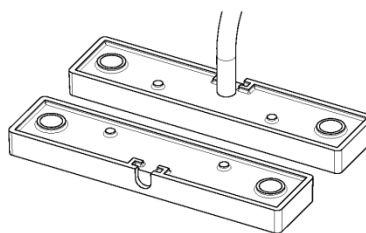


RESISTORS (OPTIONAL)

MC 740 (MC 740P) is available in two additional options with resistors of the chosen value: MC 740-R (MC 740P-R) with one resistor parallel to the alarm switch and MC 740-2R (MC 740P-2R) with two resistors in 2 EOL configuration (see schematics below).

MC 740-R (MC 740P-R):

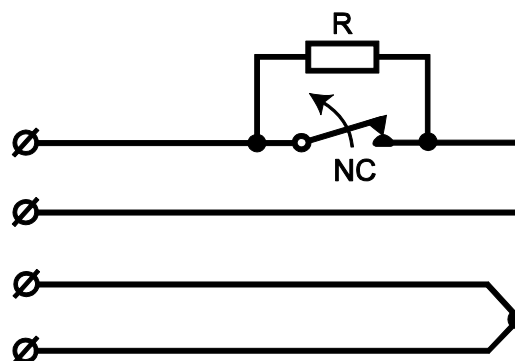

MC 740-2R (MC 740P-2R):

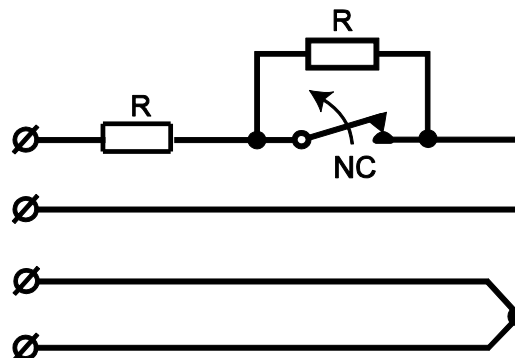

We reserve the right to changes without notice.