

quadrus



HRT82PB


HRT82PB panel provides four momentary type buttons with insulated NO contacts and four externally controlled LED indicators. The NO contact can be used to trigger controller's input while LEDs to indicate state of controller's outputs. Panel can be used in other scenarios as long as its nominal electrical condition are assured.



Features:

- four buttons with insulated NO contacts 0.125A/48VDC
- four LED indicators externally controlled by 12VDC
- screw terminals

HRT82PB views and installation diagram

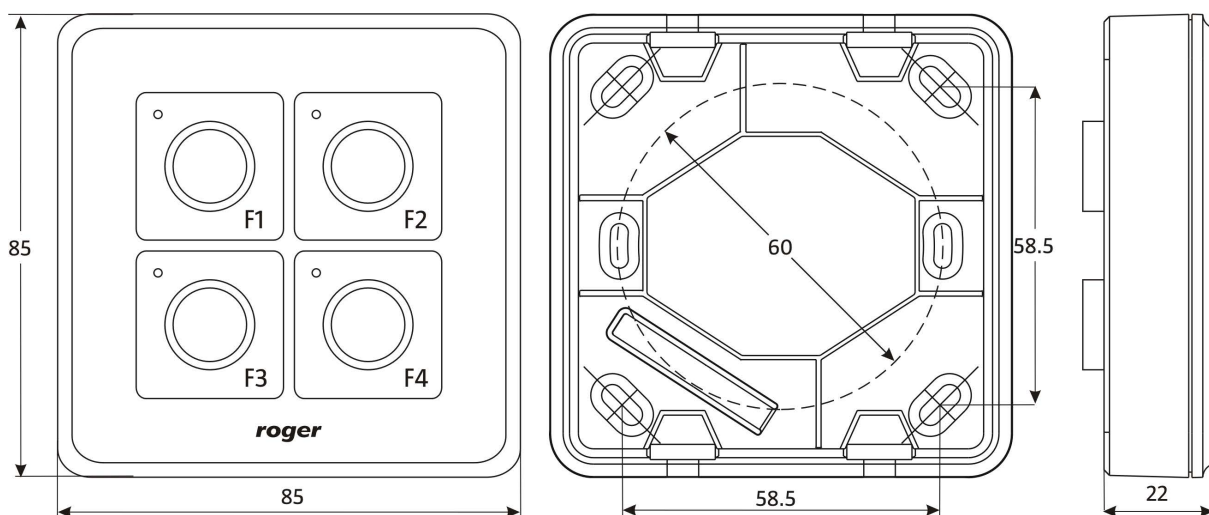

Available versions and symbols	
Symbol	Description
HRT82PB	Standard version, black panel, dark grey enclosure

Technical Specification	
Parameter	Value
Supply voltage	10-15 VDC
Buttons contacts	NO/0,125A/48VDC
IP code	IP41
Environmental class (EN 50133-1)	Class II, indoor, temperature: from -10°C up to +50°C, relative humidity: 10 to 95% (non-condensing)
Weight	≈100g
Approvals	CE