

DOMINO



PRT42LT

Each PRT42LT reader can be used as an universal identification point connected to the access controller.


PRT42LT readers can operate in many common communication standards (e.g. Wiegand, Mag-stripe, Clock and Data, RACS), so they can cooperate with majority of controllers from different vendors available on the market.



Features:

- EM 125 kHz cards
- Programmable data output format
- Formats: Wiegand 26-66 bits, Magstripe (Clock and data), RACS (Roger) and other
- Various ways of PIN and keypad codes transmission
- LED and Buzzer controlled through separate inputs
- Tamper
- CE mark

PRT42LT and PRT42LT-BK views and installation diagram

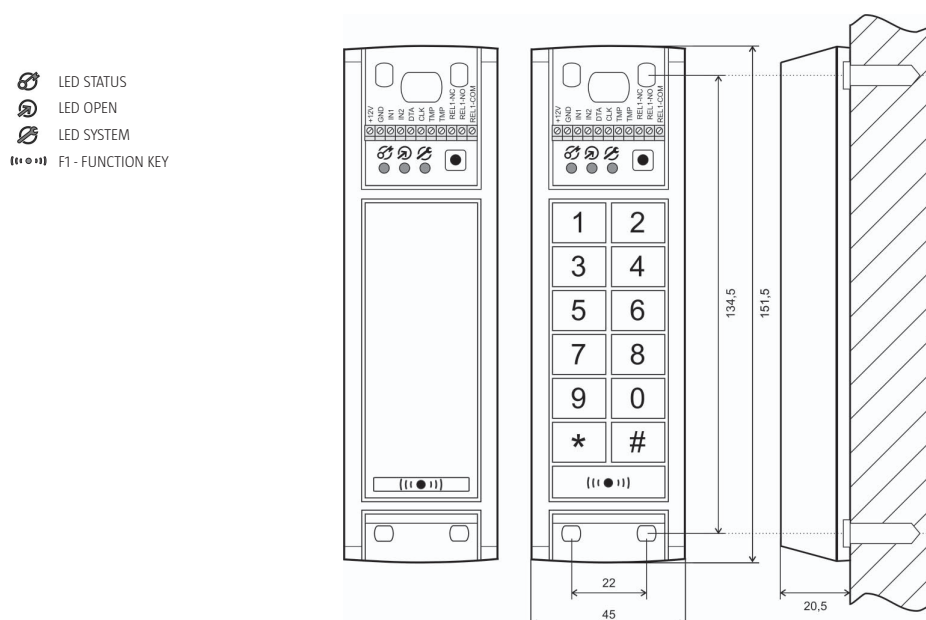

Available versions and symbols	
Symbol	Description
PRT42LT-B	Black case, keypad
PRT42LT-L	Light grey case, keypad
PRT42LT-BK-B	Black case, without keypad
PRT42LT-BK-L	Light grey case, without keypad

Technical Specification	
Parameter	Value
Supply voltage	10-15 VDC
Current consumption (average)	65mA (45mA for version without keypad)
Anti-sabotage protection (Tamper)	NC contact, 50mA/24V, IP67
Reading distance	Up to 15 cm
Environmental class	Class I, Indoor, temperature: +5°C- +40°C, relative humidity: 10 to 95% (non-condensing)
Dimensions H x W x D	151.5 X 45 X 20.5 mm
Weight	≈90g
Approvals	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl

roger®