

radius



## PRT64LT

Each PRT64LT reader can be used as an universal identification point connected to the access controller.


PRT64LT readers can operate in many common communication standards (e.g. Wiegand, Magstripe, Clock and Data, RACS), so they can cooperate with majority of controllers from different vendors available on the market.



### Features:

- EM 125 kHz cards
- Programmable data output format
- Formats: Wiegand 26-66 bits, Magstripe (Clock and data), RACS (Roger) and other
- Various ways of PIN and keypad codes transmission
- LED and Buzzer controlled through separate inputs
- Tamper
- CE mark

### PRT64LT views and installation diagram

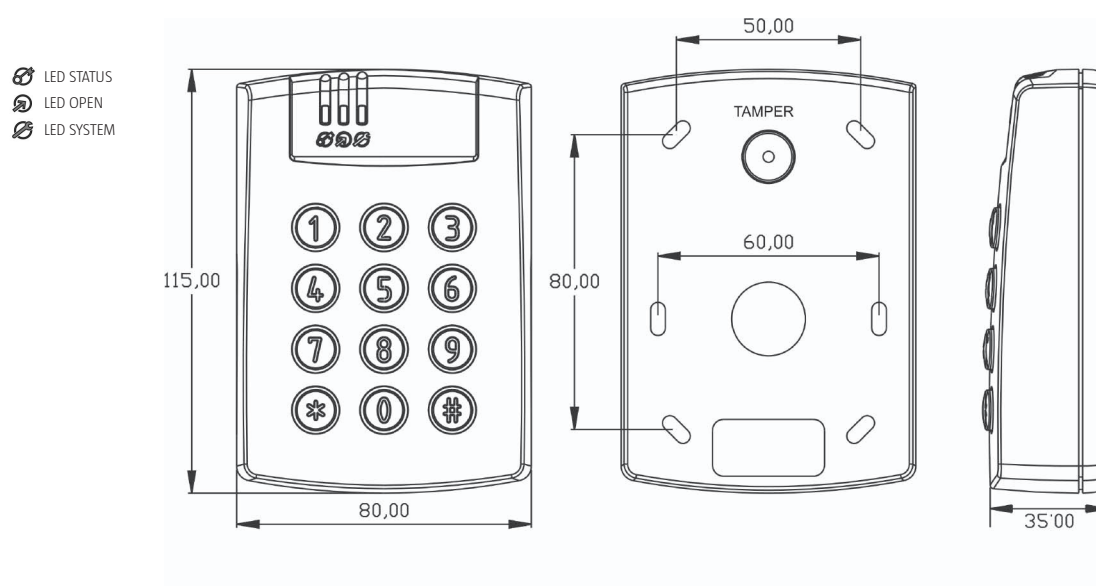

Available versions and symbols	
Symbol	Description
<b>PRT64LT-G</b>	Dark grey case
<b>PRT64LT-S</b>	Silver-metallic case

Technical Specification	
Parameter	Value
<b>Supply voltage</b>	10-15 VDC
<b>Current consumption (average)</b>	65mA
<b>Anti-sabotage protection (Tamper)</b>	NC contact, 50mA/24V, IP67
<b>Reading distance</b>	Up to 15 cm
<b>Environmental class</b>	Class IV, outdoor-general, temperature: -25°C - +60°C, relative humidity: 10 to 95% (non condensing)
<b>Dimensions H x W x D</b>	115 X 80 X 35 mm
<b>Weight</b>	≈120g
<b>Approvals</b>	CE

ROGER sp.j  
Gościszewo 59  
82-400 Sztum  
Poland

T. +48 55 272 0132  
F. +48 55 272 0133  
E. roger@roger.pl  
I. www.roger.pl

**roger**®