



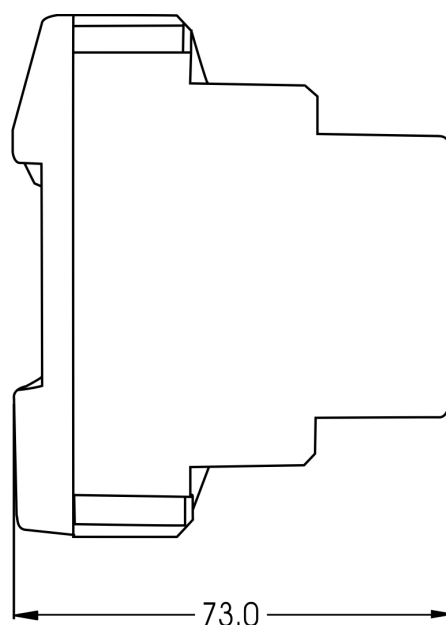
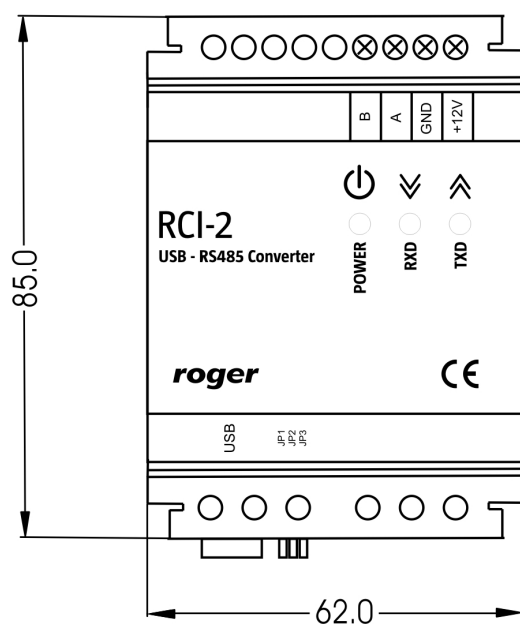
## RCI-2

RCI-2 allows for communication with serial device operating in the RS485 standard via USB PC port. Generally, this interface has been designed for RACS access control system nevertheless it can be used in other situations where there is a need to communicate with a RS485 serial device via USB PC port. Thanks to the galvanic isolation both systems (PC and RS485) are isolated and no equalization currents between these systems are assured.



**Features:**

- Designed for RACS access control system
- Galvanic isolation between PC USB and RS485
- Virtual serial port driver
- Plastic enclosure dedicated for installation on DIN rail

**RCI-2 views and dimensions****Available versions and symbols**

Symbol	Description
<b>RCI-2</b>	Standard version

**Technical Specification**

Parameter	Value
<b>Supply voltage</b>	Nominal 12VDC (10...15VDC allowed)
<b>Current consumption</b>	Average 20 mA
<b>Max. baud rate</b>	230,4 kbit/s
<b>Environmental class</b>	Class I, indoor general conditions, temperature: +5°C to +40°C, relative humidity: 10 to 95% (no condensation)
<b>Dimensions</b>	62 x 85 x 73 mm (WxHxD)
<b>Weight</b>	≈110g
<b>Certificates</b>	CE

ROGER sp.j  
Gościszewo 59  
82-400 Sztum  
Poland

**T.** +48 55 272 0132  
**F.** +48 55 272 0133  
**E.** roger@roger.pl  
**I.** www.roger.pl