



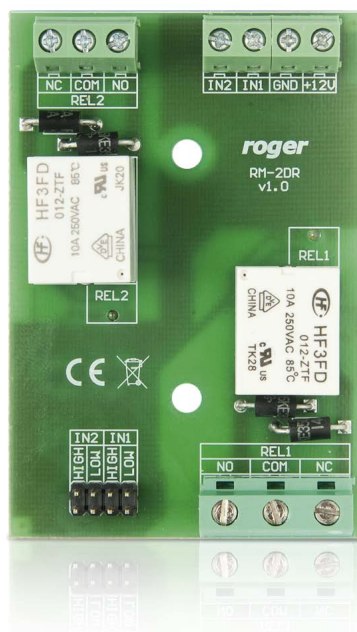

## RM-2DR-BRD


The module with two relays, each with 5A/230VAC or alternatively 5A/30VDC max load. Both relays can be triggered by logical high or low voltage connected to RM-2DR inputs. The module can be used to increase max load of controller output line and/or for electrical separation between output line and load point (e.g. door lock, siren etc.). RM-2DR module can operate with all types of Roger controllers and is so universal that it can be easily used outside RACS 4 access control system by third parties applications.

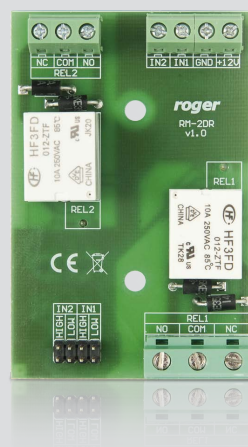

### Features:

- Two relays with transistor type triggering
- The module is available inside plastic enclosure dedicated to installation on 35mm DIN rail
- The module can be used for increasing max load of controller outputs up to 5A/230VAC

### RM-2DR-BRD view and dimensions

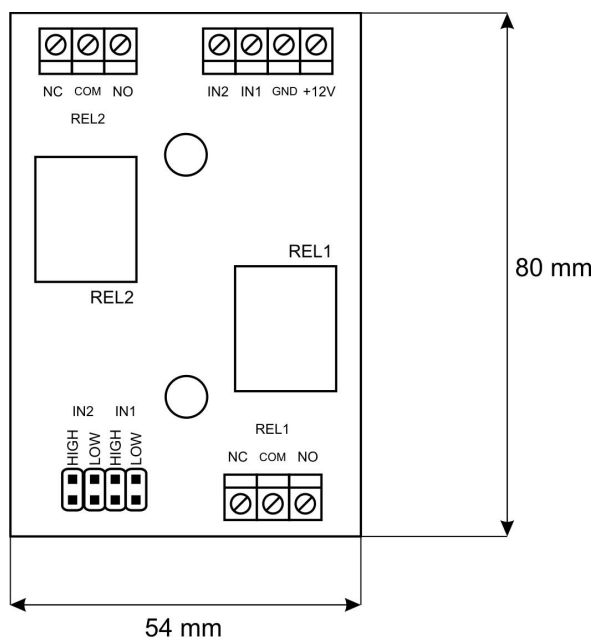

| Available versions and symbols |                  |
|--------------------------------|------------------|
| Symbol                         | Description      |
| <b>RM-2DR-BRD</b>              | Standard version |

| Technical Specification         |                                              |
|---------------------------------|----------------------------------------------|
| Parameter                       | Value                                        |
| <b>Rated supply voltage</b>     | 12 VDC                                       |
| <b>Current consumption</b>      | max 65mA                                     |
| <b>Relay max load</b>           | 230VAC/5A or 30VDC/5A                        |
| <b>Environmental conditions</b> | -25C..+60C, humidity 10-95% (non-condensing) |
| <b>Dimensions</b>               | 54 x 80 mm (WxH)                             |
| <b>Weight</b>                   | ≈50g                                         |
| <b>Certificates</b>             | CE                                           |